



LU-BW-100

RGBW FLAT COVER FROSTED


LUMINAIRE PHOTOMETRIC TEST REPORT

Eff: 15.19 lm/W

Imax (cd) 82.13


Total Flux 212.68

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

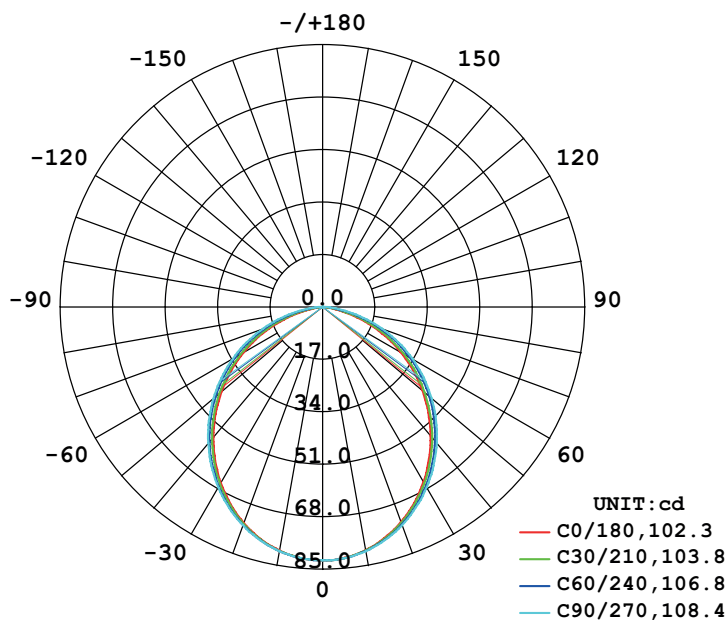


AVERAGE BEAM ANGLE (50%) : 105.3 DEG

ISOCANDELA DIAGRAM

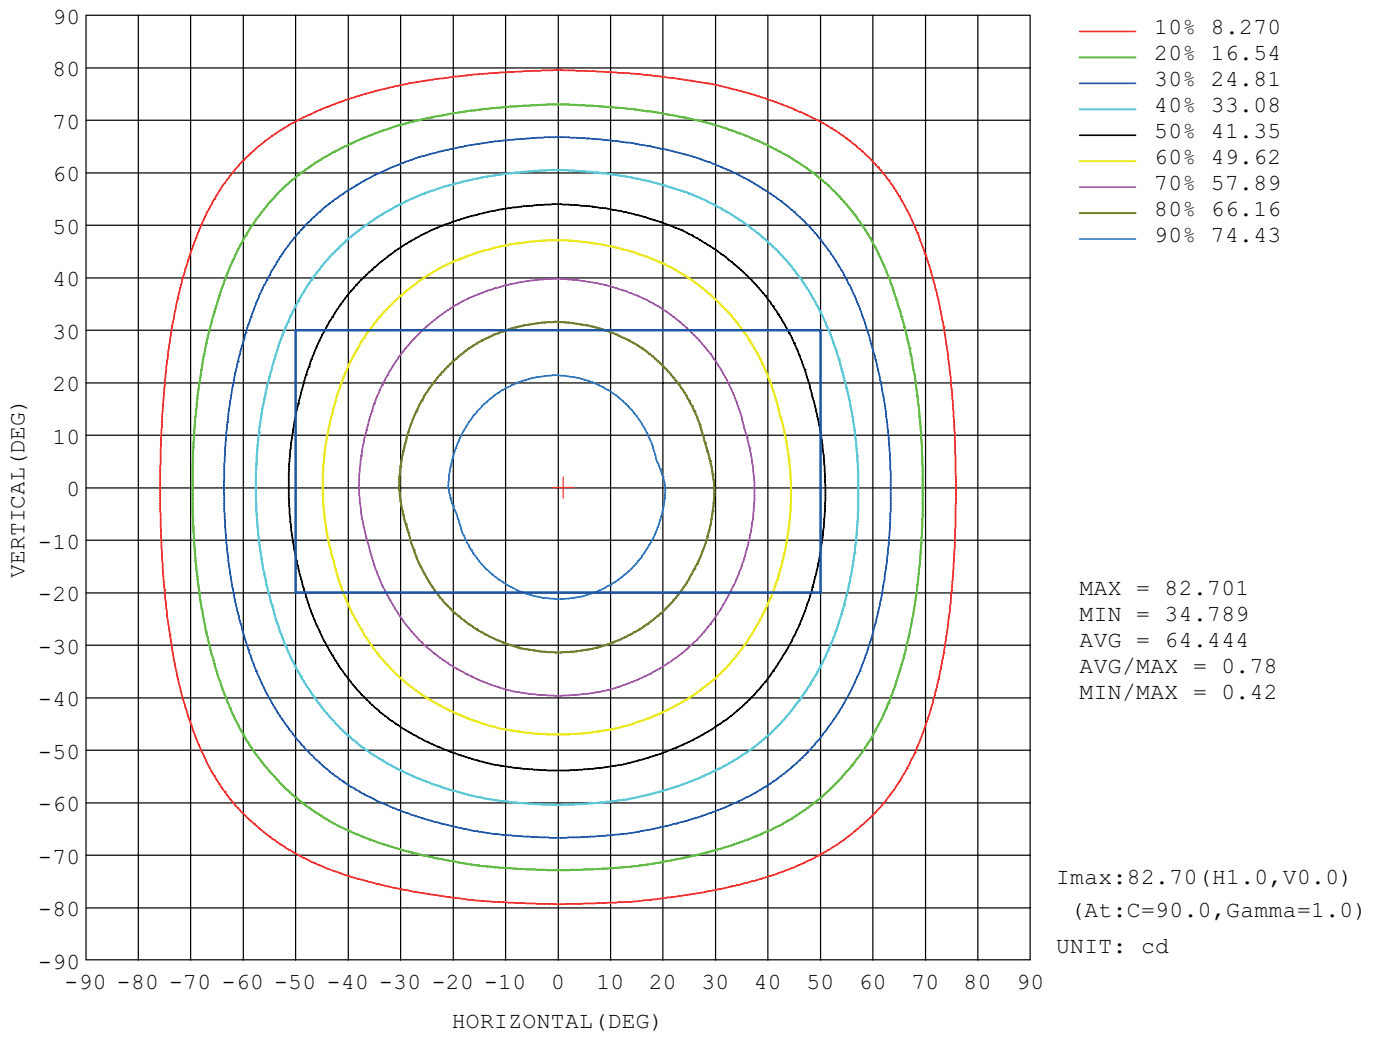


AAI FIGURE

Flux out: 147.3 lm

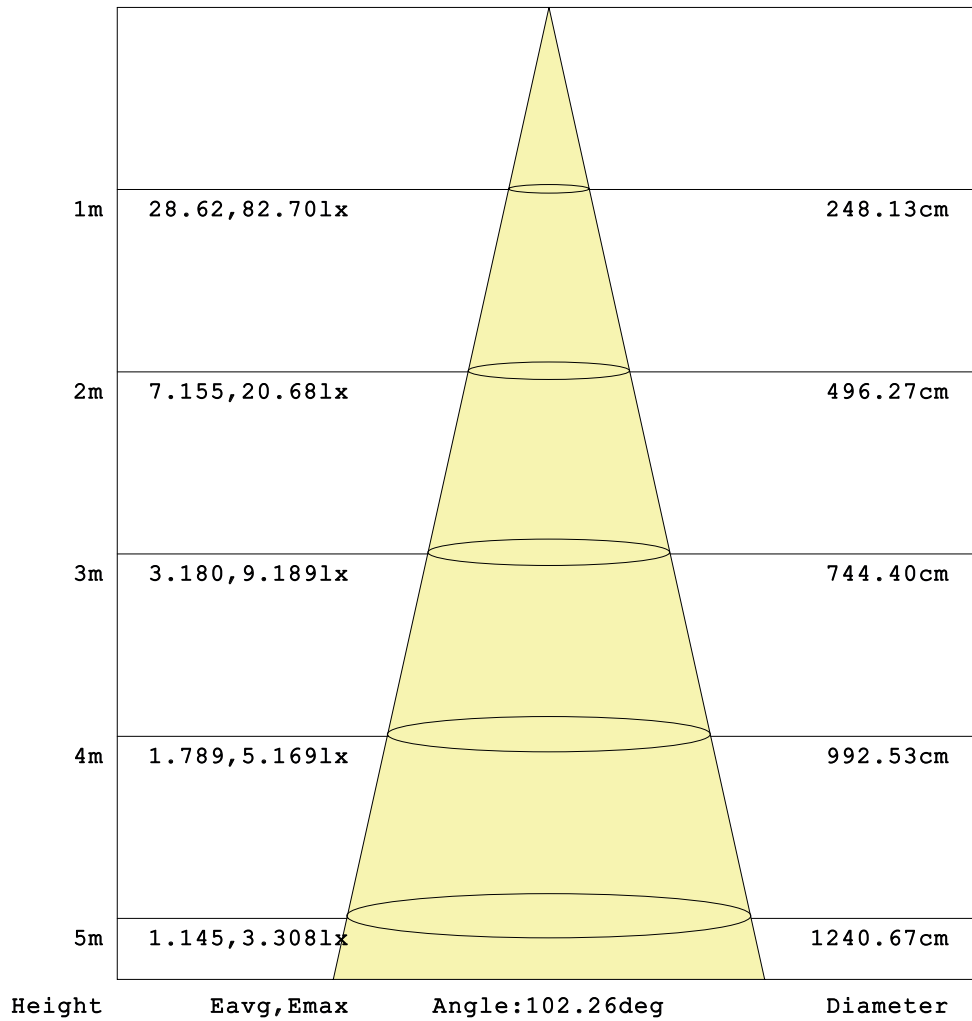

NOTE: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

ISOLUX DIAGRAM

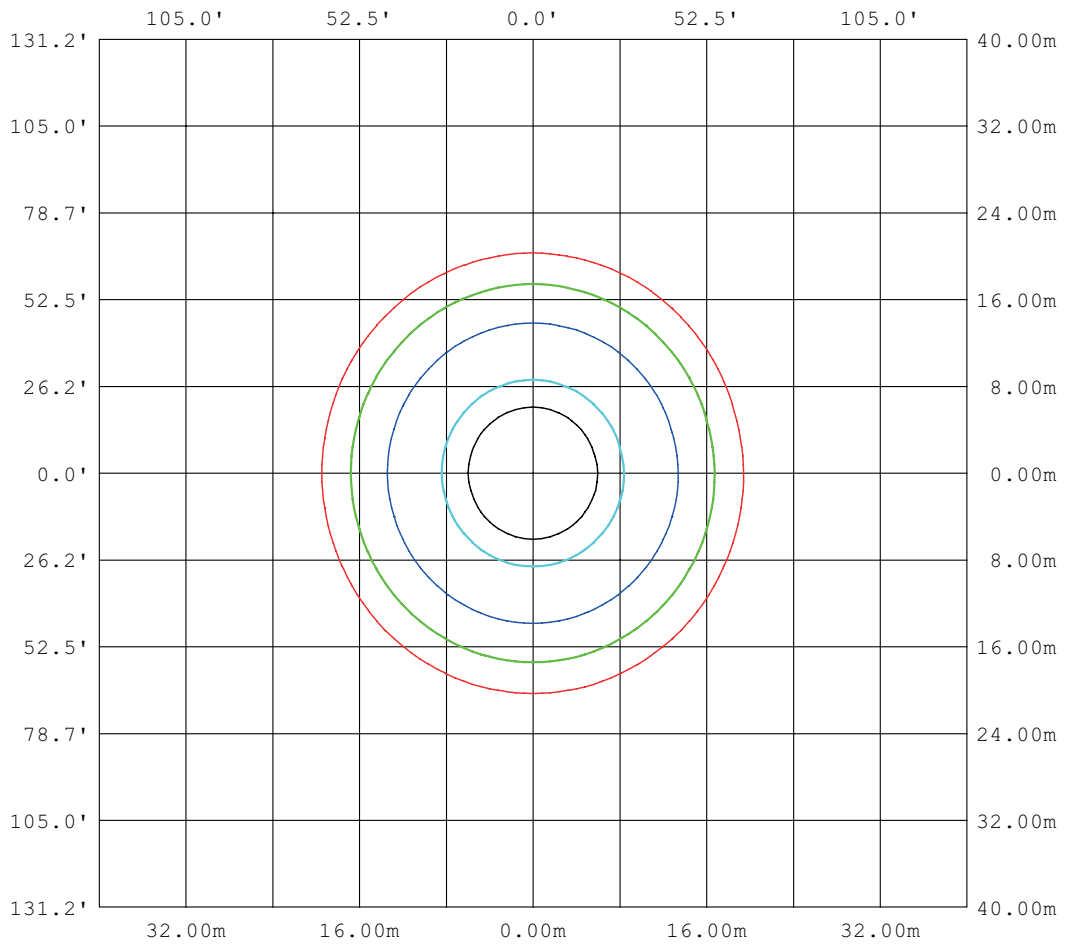

MOUNTING HEIGHT: 33' (10.0m)

- 3% 0.02481lx 0.002305fc
- 5% 0.04141lx 0.003842fc
- 10% 0.08271lx 0.007683fc
- 30% 0.24811lx 0.02305fc
- 50% 0.41351lx 0.03842fc

PLANAR ILLUMINANCE CURVE

